

PRODUCT ADVANTAGES



- ▶ Most economical fire and safety rated glazing meeting all the standards for 90 minute temperature rise doors.
- ▶ Non-wired clear glazing providing the highest visual clarity.
- ▶ Impact safety rated to meet federal and code standards.
- ▶ Vision lite kits available in these sizes: 5x35, 6x27, 7x22, and 12x12
- ▶ Can be used for interior and exterior applications.
- ▶ Lifetime warranty.
- ▶ USA manufactured for fast delivery and competitive pricing.

Fire Rating	Application	Max. CV Area	Max. CV Width	Max. CV Height	Stops
90 minutes	Doors (T)	100 sq. in.	10"	33"	5/8"

TESTED AND CERTIFIED TO UL 10B AND 10C




SuperLite X-90 in HMTR door

SuperLite X-90 is listed and labeled by Intertek/Warnock-Hersey Inc., a nationally recognized testing laboratory approved by OSHA.



FIRE PROTECTIVE

Contains smoke and flames.
Does not block radiant heat.

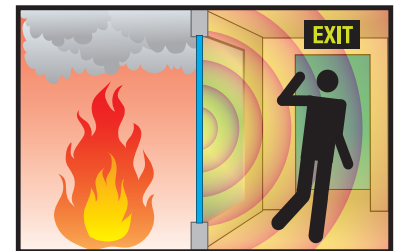

For fire resistive glazing that blocks radiant heat see SuperLite II-XL.

SPECIFICATIONS

Thickness: 3/4" (19mm)

Weight: 9.0 lbs./sq.ft.

Fire Rating: 90 minutes with hose stream

Sound Transmission Rating:
Approx. STC 38 rating

Solar Heat Gain Coefficient:
0.67 SHGC

Impact Safety Rating:
CPSC 16 CFR 1201 Cat. I and II

3-Part Specifications:
Available at
www.safti.com/specifications

APPROVALS


UL 10B, UL 10C, NFPA 80,
NFPA 252, ULC CAN4-S104,
CPSC 16 CFR 1201 Cat. I & II.



Made in the USA

Typical Details More details available at www.safti.com/details

SuperLite X-90 in HMTR Door and 120 min GPX Transom

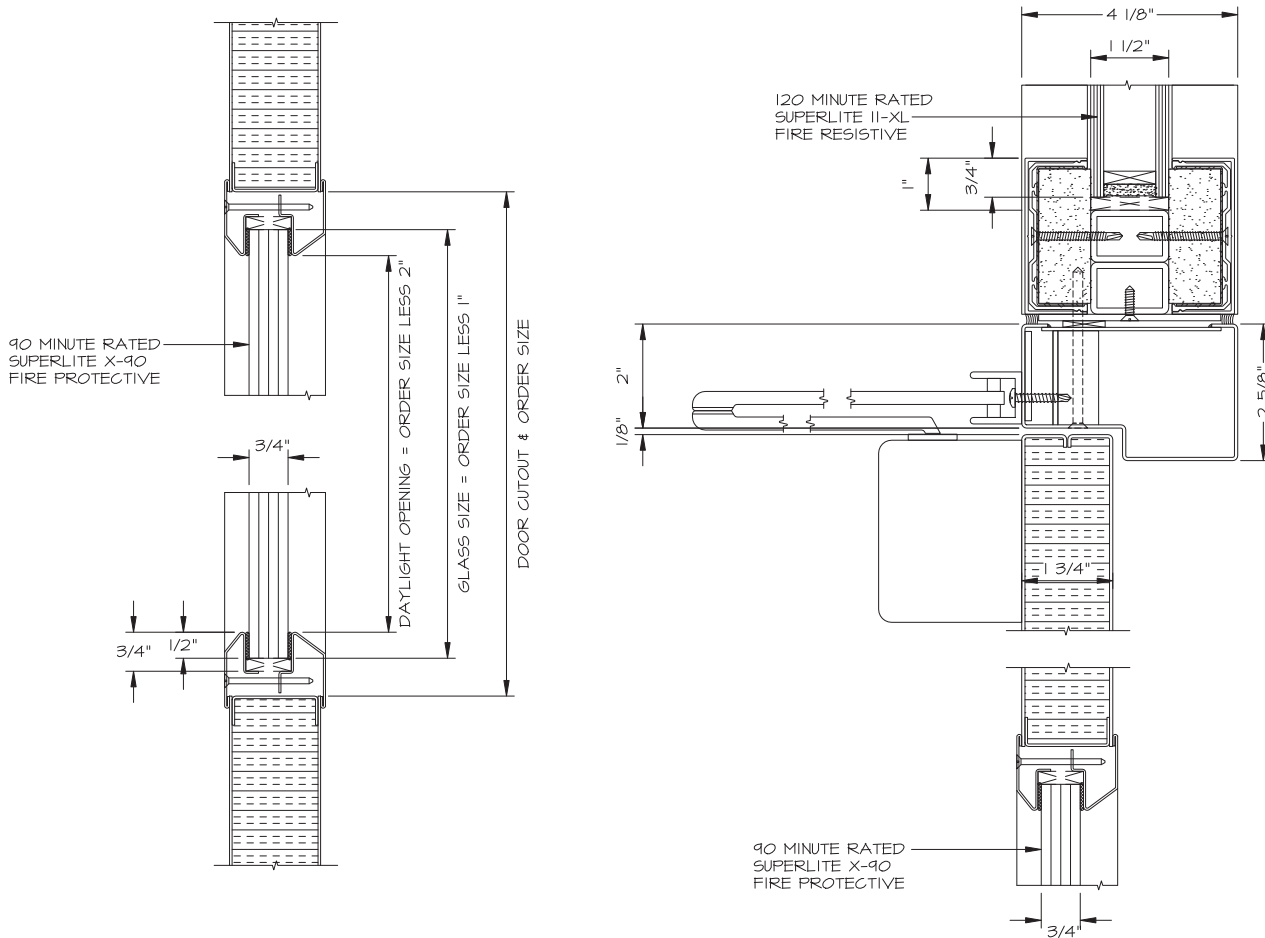

Scale 3" = 1"

The information provided herein is for general reference only. Please visit www.safti.com for the most updated information.